



Extras - Mounting series

Secure, easy operation

If you consider a fixed mounting solution, CTOUCH offers the most flexible wall lift of its kind. The Wallom2 wall lift has a unique and enhanced design with high demands of ergonomics, quality and durability. The lift can be mounted extremely tight to the wall and fits all ages or circumstances because of the extreme wide span. Easy to install and operate.

Easy to use:

- ✓ Remote with 3 buttons to set your own personalized height preference
- ✓ Smart phone app for secured Bluetooth control (option)

Easy to install:

- ✓ The lift comes pre-assembled in ONE box and can be installed by one person in < 20 minutes
- ✓ Suits CTOUCH display sizes from 55" to 86"
- ✓ Maximize your reach height. From as low as 50 cm (bottom side of 86" display) to as high as 270 cm (top side 86" display)

Durable and secure:

- ✓ Dutch design and solid Danish Linak[®] lift engineering
- ✓ Anti-collision module to prevent people and objects from unintended contact with the lift (option)
- ✓ 5 years all-in warranty

Product number

- Wallom2 wall lift - Black (RAL 9005) 10080250
A lift that can be mounted extremely tight to the wall and fits with an extreme wide span.

Mounting system

- Electrical lift system by Linak[®]
- Extreme tight wall mounting - 90 mm!
- Floor stand: 2 Leveling feet
- Colour lift: Aluminium and black
- Max. weight: 150 kg
- Mains voltage 100 - 240V AC, 50Hz - 60Hz (universal)

Features

- Height adjustment: Electrical
- Integrated extra height - 350 mm
- Control panel:
Up and down
3 programmable buttons to set your personalized working height
- Lift speed: 15 mm/s - From bottom to top in 25 sec.
- Vesa dimensions:
400 mm (W) x 400 mm (H)
600 mm (W) x 400 mm (H)

Optional accessories

- Extension bracket to higher or lower the display by an extra 230 mm (see nr. 1) 10080256
- Pentray: 50 mm (D) x 500 mm (W) (see nr. 2) 10080257
- Anti collision module 10080264

Warranty

- 5 years warranty based on carry-in

Logistic dimensions

- Box size (mm): 1347 (W) x 670 (D) x 196 (H) - 38 kg
- EAN 8719481480004

About the Wallom2 lift

The Wallom2 owns a high quality solid lift system with a linear actuator of LINAK[®].

- Smooth and soundless lift system
- Robust and strong design
- Lifetime lift (cycle up & down): 10.000



Optional accessories


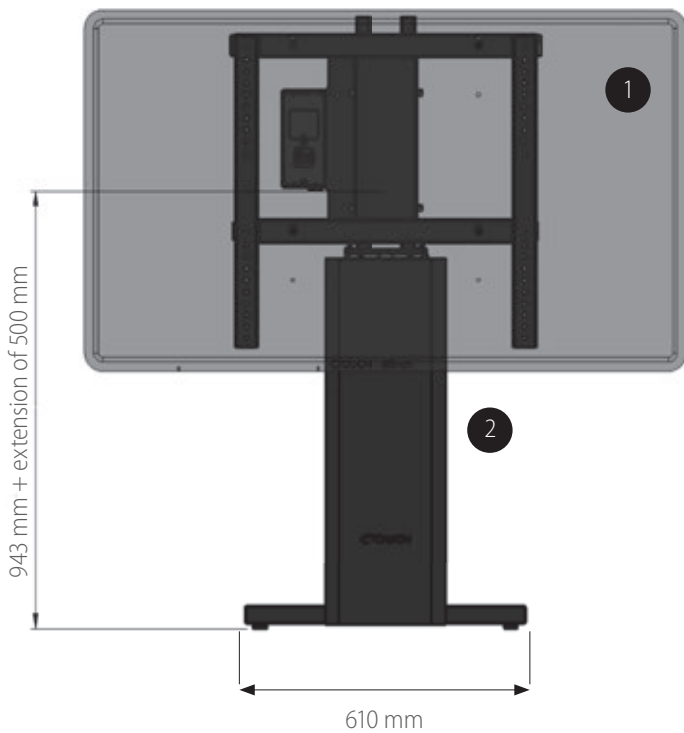


FIG. A

FIG. B

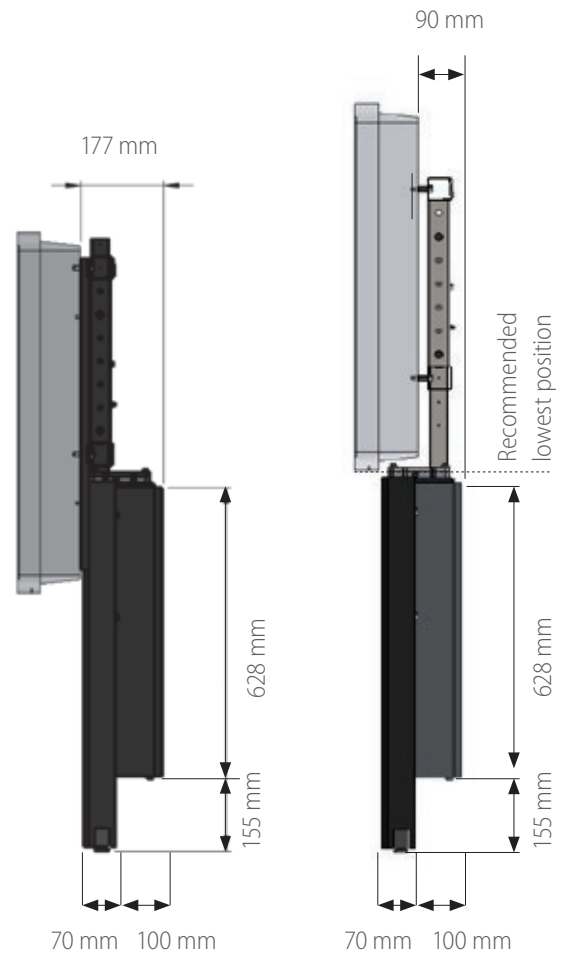

Display configurations

Wallom2 wall lift height positions with: Laser air+, Leddura 2Share & Leddura 2Meet (in mm):

| | Integrated bracket mounted along the front of the lift (see fig. A) | | Integrated bracket mounted on top of the lift (see fig. B) | | With optional extension bracket, mounted along the front | |
|---------|---|---------------------------------|--|---------------------------------|--|---------------------------------|
| | bottom display in lowest position | top display in highest position | bottom display in lowest position | top display in highest position | bottom display in lowest position | top display in highest position |
| 55 INCH | 659 | 1940 | 1009 | 2290 | 429 | 2520 |
| 65 INCH | 605 | 2007 | 955 | 2357 | 375 | 2569 |
| 70 INCH | 668 | 2136 | 1018 | 2486 | 438 | 2716 |
| 75 INCH | 546 | 2074 | 896 | 2424 | 316 | 2654 |
| 86 INCH | 492 | 2170 | 842 | 2520 | 262 | 2750 |

No rights can be derived from this data sheet. Product specifications and data of this product are subject to change without notice to improve reliability, function, design or otherwise.

All rights reserved. CTOUCH products and services mentioned herein as well as their respective logos are trademarks or registered trademarks of CTOUCH Europe B.V.. All other product and service names mentioned are the trademarks of their respective owners.